Grundfos CIM/CIU 300

BACnet MS/TP for Grundfos E-pumps

GB Functional profile and user manual

Original installation and operating instructions.

CONTENTS

1.	**Symbol used in this document**	**2**
2.	**Introduction**	**2**
2.1	About this functional profile	2
2.2	Assumptions	2
2.3	Definitions and abbreviations	2
2.4	System diagrams	3
2.5	Specifications	4
3.	**BACnet interface**	**5**
3.1	BACnet bus topology	5
3.2	CIM 300 BACnet module	6
3.3	Connecting to the BACnet network	6
3.4	Setting the BACnet transmission speed	6
3.5	Selecting the Device Object Instance Number	6
3.6	Selecting the Device Object Name	7
3.7	Selecting the BACnet MAC address	7
3.8	Termination resistor	7
3.9	Cable length	7
4.	**LEDs**	**8**
4.1	LED1, BACnet MS/TP communication	8
4.2	LED2, internal communication	8
5.	**Supported services**	**9**
5.1	Data sharing services	9
5.2	Device management services	9
6.	**Object overview**	**10**
6.1	Device Object	10
6.2	Binary inputs	11
6.3	Binary outputs	11
6.4	Multistate inputs	12
6.5	Multistate outputs	12
6.6	Analog inputs	13
6.7	Analog outputs	14
6.8	Analog values	14
7.	**Detailed descriptions**	**15**
7.1	Control modes	15
7.2	Setpoint	16
7.3	BACnet communication watchdog	16
7.4	Fault monitoring and resetting	16
7.5	Pump control via BACnet	16
7.6	Product simulation	17
8.	**Commissioning**	**17**
8.1	Step-by-step guide to hardware setup (CIU 300)	17
8.2	Step-by-step guide to hardware setup (CIM 300)	17
9.	**Fault finding**	**18**
9.1	LED status	18
9.2	BACnet faults	18
10.	**BACnet telegrams**	**19**
10.1	BACnet MS/TP telegram overview	19
10.2	Telegram types	19
11.	**Grundfos alarm and warning codes**	**20**
12.	**BACnet MAC address**	**22**
13.	**Disposal**	**22**

1. Symbol used in this document

Note ***Notes or instructions that make the job easier and ensure safe operation.***

2. Introduction

2.1 About this functional profile

This functional profile describes the CIU 300 (BACnet Communication Interface Unit 300) for the following Grundfos pumps:

- GRUNDFOS MAGNA (with add-on GENIbus module)
- Grundfos UPE Series 2000 (UPE 80-120 and 100-120)
- Grundfos CRE, CRNE, CRIE, MTRE, CME (single-phase and three-phase, up to 11 kW)
- Grundfos CRE, CRNE, CRIE, MTRE, CME (three-phase, 11-22 kW)
- Grundfos TPE, TPE Series 2000, NBE, NKE (single-phase and three-phase, up to 11 kW)
- Grundfos TPE, TPE Series 2000, NBE, NKE (three-phase, 11-22 kW)
- Grundfos CUE frequency converter (all versions, 0.55 - 250 kW).

The data in this document are subject to change without prior notice. Grundfos cannot be held responsible for any problems caused directly or indirectly by using information in this functional profile.

2.2 Assumptions

This functional profile assumes that the reader is familiar with commissioning and programming BACnet devices. The reader should have some basic knowledge of the BACnet protocol and technical specifications. It is also assumed that an existing BACnet MS/TP network is present.

2.3 Definitions and abbreviations

CIM	Communication Interface Module, a Grundfos add-on module
CIU	Communication Interface Unit, a Grundfos box for CIM modules
CRC	Cyclic Redundancy Check, a data error detection method
Device	A node on the BACnet MS/TP network
GENIbus	Proprietary Grundfos fieldbus standard based on RS-485
Inter-network	A set of two or more BACnet networks interconnected by routers
LED	Light Emitting Diode
MAC	Media Access Control, a sublayer of the data communication protocol
MS/TP	Master-Slave / Token-Passing, a data protocol used for BACnet RS-485
Router	A device that connects two or more networks at the network layer
Transmission speed	Bits transferred per second
Trunk cable	Main RS-485 cable on a BACnet MS/TP network

2.4 System diagrams

The system diagrams give an overview of how to connect the CIM/CIU 300 to the Grundfos pump that is to be connected to a BACnet network.

CIM 300

The CIM 300 is an add-on communication module to be installed internally in a Grundfos pump, using a 10-pin connection. In this setup, the pump will supply power to the CIM 300. See fig. 1.
This installation option is currently available for Grundfos E-pumps, 11-22 kW.

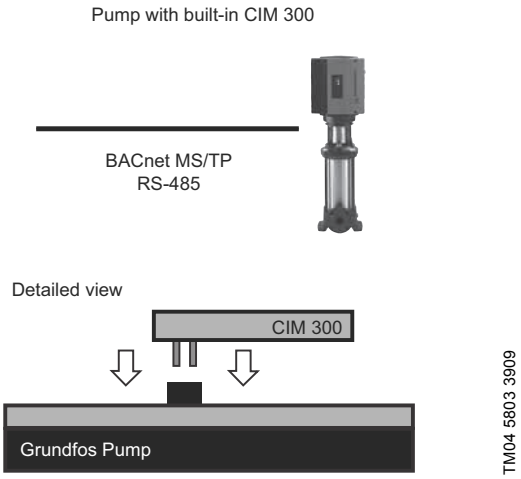

Fig. 1 CIM 300 solution

CIU 300

The CIU 300 solution is a box with a power supply module and a CIM 300 BACnet module. It can either be mounted on a DIN rail or on a wall. See fig. 2.
It is used in conjunction with Grundfos E-pumps that do not support an internal, add-on communication module (CIM 300).

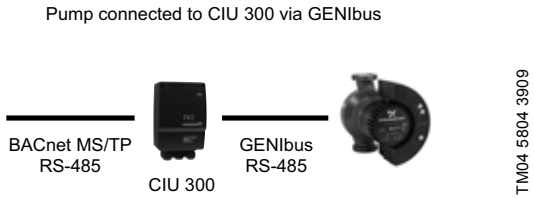

Fig. 2 CIU 300 solution

2.5 Specifications

General data	Description	Comments
GENIbus visual diagnostics	LED2	Red/green status LED. See section *4.2 LED2, internal communication*.
Communication Interface Unit (CIU 300)		
Power supply	24-240 V AC/DC	Located in the CIU 300.
GENIbus connection type	RS-485	
GENIbus wire configuration	Three-wire + screen	Conductors: A, B and Y.
BACnet		
Data protocol	BACnet MS/TP	
BACnet connector	Screw-type terminal	3 pins. See section *3.2 CIM 300 BACnet module*.
BACnet connection type	RS-485	
BACnet wire configuration	Two-wire + ground	Conductors: Plus, Minus and Ground. See section *3.3 Connecting to the BACnet network*.
Maximum cable length	1200 m	Equals 4000 ft.
MAC address	0-127	Set via rotary switches SW6 and SW7. See section *3.7 Selecting the BACnet MAC address*.
Line termination	On or Off	Set via DIP switches SW1 and SW2. See section *3.8 Termination resistor*.
Supported transmission speeds [bits/s]	9600, 19200, 38400, 76800	Set via DIP switches SW4 and SW5. See section *3.4 Setting the BACnet transmission speed*.
Data bits	8	Fixed value.
Stop bits	1	Fixed value.
Parity	None	Fixed value.
BACnet visual diagnostics	LED1	Red/green status LED. See section *4.1 LED1, BACnet MS/TP communication*.
Maximum number of BACnet devices	32	Using repeaters, this number can be increased.
Grundfos BACnet vendor ID	227	
BACnet segmentation support	No	
Character set support	ANSI X3.4	Base definition for the widely used character code known as ASCII.
BACnet device profile	B-ASC	BACnet Application-Specific Controller.
BACnet MS/TP master	Yes	The CIM/CIU 300 is a BACnet MS/TP master device.
Manual slave address binding	No	

3. BACnet interface

3.1 BACnet bus topology

The Grundfos CIM/CIU 300 is connected as a BACnet MS/TP master directly to the BACnet MS/TP network.

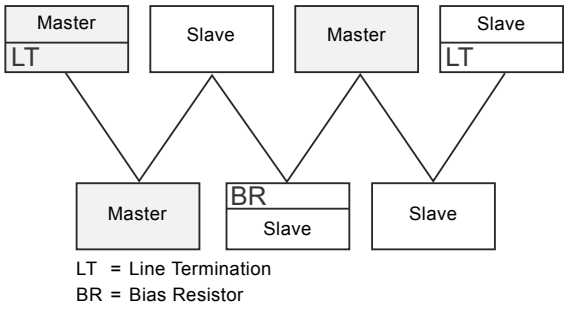

Fig. 3 Example of BACnet MS/TP network

BACnet MS/TP is a multi-master system, meaning that there can be more than one master on the network. It uses a token to control access to the bus network. A master node may initiate the transmission of a data telegram when it holds the token. Both master and slave nodes may transmit data telegrams in response to requests from master nodes, but slaves never hold the token. Master nodes pass the token between them.

A BACnet MS/TP segment is a single contiguous medium to which BACnet nodes are attached. Segments can be connected by use of repeaters or bridges, thus forming networks.

Multiple networks may be interconnected by BACnet routers to form a BACnet inter-network.

3.1.1 Line termination resistors

Line termination must be connected at each of the two ends of the segment medium. The CIM/CIU 300 has optional line termination resistor on board.

3.1.2 Bias resistors

At least one set, and no more than two sets, of network bias resistors must exist for each segment so that an undriven communications line will be held in a guaranteed logical one state. The bias provides a reliable way for stations to detect the presence or absence of signals on the line. An unbiased line will take an indeterminate state in the absence of any driving node.

The CIM/CIU 300 has no bias resistors.

3.2 CIM 300 BACnet module

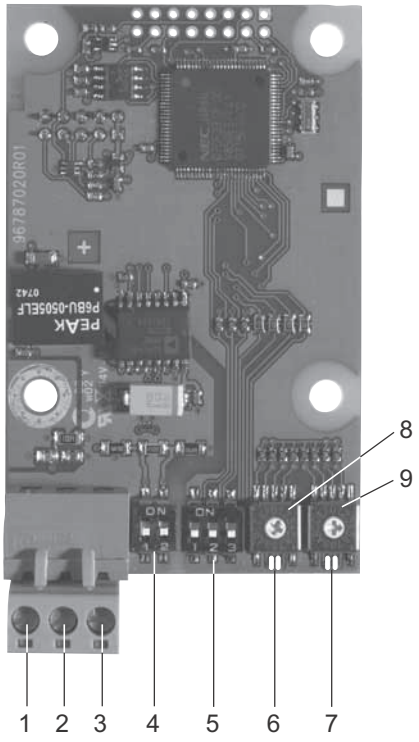

TM04 1697 0908

Fig. 4 CIM 300 BACnet module

Pos.	Designation	Description
1	Plus	BACnet Plus terminal (RS-485 positive data signal)
2	Minus	BACnet Minus terminal (RS-485 negative data signal)
3	Ground	BACnet Ground terminal
4	SW1/SW2	On/off switches for termination resistor
5	SW3/SW4/SW5	Switches for selecting the BACnet transmission speed and the default or custom Device Object Instance Number.
6	LED1	Red/green status LED for BACnet communication
7	LED2	Red/green status LED for internal communication between the CIM 300 and the Grundfos pump
8	SW6	Hexadecimal rotary switch for setting the BACnet MAC address (four most significant bits)
9	SW7	Hexadecimal rotary switch for setting the BACnet MAC address (four least significant bits)

3.3 Connecting to the BACnet network

A screened, twisted-pair cable must be used.

BACnet terminal	Recommended colour	Data signal
Plus	Red	Positive
Minus	Green	Negative
Ground	Grey	Ground

The ANSI/ASHRAE BACnet standard states that the cable screen must only be earthed at one end of the segment to prevent earth fault currents.

3.4 Setting the BACnet transmission speed

The transmission speed must be set correctly before the CIM 300 is ready to communicate on the BACnet MS/TP network. DIP switches SW4 and SW5 are used to set the transmission speed. The default transmission speed is 9600 bits/s, but higher speeds are recommended for better data throughput. All devices on the BACnet MS/TP network must communicate at the same transmission speed.



TM04 1710 0908

Fig. 5 BACnet transmission speed settings

3.4.1 DIP switch settings

Available transmission speeds in bits/s: 9600, 19200, 38400 and 76800.

Use DIP switches SW4 and SW5 to select the desired speed.

Transmission speed [bits/s]	SW4	SW5
9600	OFF	OFF
19200	OFF	ON
38400	ON	OFF
76800	ON	ON

The default transmission speed is 9600 bit/s, as per the BACnet MS/TP standard. The transmission speed will be effective immediately after setting the values of the DIP switch.

3.5 Selecting the Device Object Instance Number

The Device Object Identifier value consists of two components:

- a 10-bit Object Type (bits 22 - 31)
- a 22-bit Instance Number (bits 0 - 21).

TM04 5977 4509

Fig. 6 Bit numbers

The Object Type is fixed and determines that it is a Device Object. The Instance Number is a numeric code that is used to identify the device. It must be unique inter-network-wide, i.e. on all interconnected networks.

The CIM 300 offers two different approaches to setting the BACnet Device Object Instance Number: default and custom, both described in the following subsections.

3.5.1 Default Instance Number

By default, the CIM 300 uses a pre-defined Device Object Instance Number, which is 227XXX where XXX is the BACnet MAC address. This gives an Instance Number range of 227000 to 227127. See section *3.7 Selecting the BACnet MAC address* for more information on MAC addresses.

Example:

The BACnet MAC address is set to 20 via the hexadecimal rotary switches, so the Device Object Instance Number is 227020.

3.5.2 Custom Instance Number

To use the complete Instance Number range, set the new Instance Number with the BACnet object Custom Device Object Instance Number (AV, 0), and set SW3 to ON. This will immediately set the new Device Object Instance Number. See fig. 7 for DIP switch location.



TM04 1709 0908

Fig. 7 Device Object Instance Number

Device Object Instance Number	SW3
Default (227000 + BACnet MAC address)	OFF
Custom, set with object (AV, 0)	ON

The default Present_Value of the Custom Device Object Instance Number is 231.

Example:

The Present_Value of Custom Device Object Instance Number (AV, 0) is 231, so the Device Object Instance Number is 231.

Note ***The Present_Value of Custom Device Object Instance Number cannot be 4194303, as this is a reserved value.***

3.6 Selecting the Device Object Name

The property Device_Name is a character string that must be unique inter-network-wide. By default, the name will be constructed as "Grundfos - XXXXXX" where XXXXXX is the current Device Object Instance Number as described in section *3.5 Selecting the Device Object Instance Number*.

Example:

The Device Object Instance Number is 227001, so the Device Object Name is "Grundfos - 227001".

If a new name is selected, it will be stored in the device and replace the default naming scheme.

3.7 Selecting the BACnet MAC address

To set the BACnet MAC address, use the two hexadecimal rotary switches (SW6 and SW7).

The value must be within the range of 0 to 127. An illegal value will result in a MAC address of 0.



TM04 1706 0908

Fig. 8 Setting the BACnet MAC address

For a complete overview of BACnet addresses, see section *12. BACnet MAC address*.

Note ***The BACnet MAC address must be set decimally from 0 to 127 and must be unique on the BACnet MS/TP segment.***

3.8 Termination resistor

A termination resistor for line termination is fitted on the CIM 300 and has a value of 120 Ω. It should be cut in if the CIM 300 is set as the last station on the network.

The CIM 300 has two DIP switches (SW1 and SW2) for cutting the termination resistor in and out. Figure 8 shows the DIP switches in cut-out state.



TM04 1701 0908

Fig. 9 Cutting the termination resistor in and out

Status	SW1	SW2
Cut-in	ON	ON
Cut-out	OFF	OFF
	ON	OFF
	OFF	ON

Default setting: Termination resistor cut-out.

3.9 Cable length

The maximum recommended cable length within a BACnet MS/TP segment is 1200 metres (4000 ft) with 0.82 mm^2 (AWG 18) cable.

The connection between the BACnet modules must be made by use of a screened, twisted-pair cable with a characteristic impedance between 100 and 130 Ω.

4. LEDs

The CIM 300 BACnet module has two LEDs.

- Red/green status LED (LED1) for BACnet MS/TP communication
- Red/green status LED (LED2) for internal communication between the CIM 300 and the Grundfos pump.

4.1 LED1, BACnet MS/TP communication

Status	Description
Off	No communication.
Flashing green	Communication active.
Flashing red	Fault in the BACnet communication.
Permanently red	Fault in the CIM 300 BACnet configuration.

4.2 LED2, internal communication

Status	Description
Off	The CIM 300 has been switched off or is starting up
Flashing red	No internal communication between the CIM 300 and the pump.
Permanently red	The CIM 300 does not support the specific pump version.
Permanently green	Internal communication between the CIM 300 and the pump is OK.

Note ***During start-up, there may be a delay of up to 5 seconds before the LED status is updated.***

5. Supported services

BACnet Interoperability Building Blocks (BIBBs) are collections of one or more BACnet services. These are described in terms of an "A" and a "B" device. Both devices are nodes on a BACnet inter-network. In most cases, the "A" device will act as the user of data (client), and the "B" device will be the provider of this data (server).

The CIM/CIU 300 is a BACnet Application-Specific Controller (B-ASC) with a few additional services.

5.1 Data sharing services

Name	BACnet BIBB code	Notes	Initiate	Execute
ReadProperty	DS-RP-B	The CIM/CIU 300 can be a provider of data.		X
ReadPropertyMultiple	DS-RPM-B	The CIM/CIU 300 can be a provider of data and return multiple values at one time.		X
WriteProperty	DS-WP-B	The CIM/CIU 300 allows a value to be changed over the network.		X
WritePropertyMultiple	DS-WPM-B	The CIM/CIU 300 allows multiple values to be changed over the network.		X
SubscribeCOV	DS-COV-B	The CIM/CIU 300 can be a provider of "Change Of Value" data. It supports up to 10 simultaneous COV subscriptions. Subscription lifetime can be limited or unlimited.		X
ConfirmedCOVNotification			X	
UnconfirmedCOVNotification			X	

5.2 Device management services

Name	BACnet BIBB code	Notes	Initiate	Execute
Who-Is	DM-DDB-A	The CIM/CIU 300 can seek information about device attributes of other devices and interpret device announcements.	X	
I-Am				X
Who-Is	DM-DDB-B	The CIM/CIU 300 can provide information about its device attributes and responds to requests to identify itself.		X
I-Am			X	
Who-Has	DM-DOB-B	The CIM/CIU 300 can provide address information about its objects upon request.		X
I-Have			X	
DeviceCommunicationControl	DM-DCC-B	The CIM/CIU 300 can respond to communication control requests. It supports both limited and unlimited duration. Password (where required) is Grundfos.		X

6. Object overview

6.1 Device Object

The following properties are supported in the Device Object (available for all pump types).

Property identifier	Data type	Note	Access
Object_Identifier	BACnetObjectIdentifier	See section *3.5 Selecting the Device Object Instance Number.*	R
Object_Name	CharacterString	See section *3.6 Selecting the Device Object Name* for details on Object Name.	W
Object_Type	BACnetObjectType	DEVICE.	R
System_Status	BACnetDeviceStatus	OPERATIONAL.	R
Vendor_Name	CharacterString	Grundfos.	R
Vendor_Identifier	Unsigned16	227.	R
Model_Name	CharacterString	Will show the Grundfos pump model to which the CIM/CIU 300 is connected.	R
Firmware_Revision	CharacterString	Revision of the firmware in the CIM/CIU 300.	R
Application_Software_Version	CharacterString	Software build date, DD-MM-YYYY.	R
Location	CharacterString	The user can enter a location here (maximum 200 characters).	W
Description	CharacterString	The user can enter a description here (maximum 200 characters).	W
Protocol_Version	Unsigned	Actual version of the BACnet protocol.	R
Protocol_Revision	Unsigned	Actual revision of the BACnet protocol.	R
Protocol_Services_Supported	BACnetServicesSupported	Indicates which standardised protocol services are supported.	R
Protocol_Object_Types_Supported	BACnetObjectTypesSupported	Indicates which standardised protocol object types are supported.	R
Object_List	BACnetARRAY[N]of BACnetObjectIdentifier	An array of objects available.	R
Max_APDU_Length_Accepted	Unsigned	The maximum number of bytes that may be contained in a single APDU. Fixed to 480.	R
Segmentation_Supported	BACnetSegmentation	Indicates if segmentation of messages is possible. Will always read NO_SEGMENTATION to indicate that segmentation is not possible.	R
APDU_Timeout	Unsigned	Indicates the amount of time in ms before timeout.	R
Number_Of_APDU_Retries	Unsigned	Maximum number of times an APDU is to be retransmitted.	R
Max_Master	Unsigned	Specifies the highest possible address for master nodes and must be between 1 and 127. The default value is 127, but this value can be lowered by the user to reduce transmission overhead.	W
Max_Info_Frames	Unsigned	Specifies the maximum number of information frames that are sent before the token is passed on. Fixed to 1.	R
Device_Address_Binding	List of BACnetAddressBindings	Holds address bindings to other devices, if any.	R
Database_Revision	Unsigned	Logical revision number for the device database.	R

6.2 Binary inputs

Binary objects that provide information from the Grundfos pump.

ID	Object Name	R/W	Notes	MAGNA + UPE	E-pumps 0.25 - 7.5 kW	CUE + E-pumps 11 - 22 kW
BI, 0	Control source status	R	Status of the actual control source. 0 = Local control 1 = Bus control.	X	X	X
BI, 1	Actual direction	R	Rotational direction of the pump impeller. 0 = Forward 1 = Reverse.		X	X
BI, 2	Rotation status	R	Rotation status. 0 = No rotation 1 = Rotation (pump running).	X	X	X
BI, 3	At minimum speed	R	0 = Not running at minimum speed 1 = Running at minimum speed.	X	X	X
BI, 4	At maximum speed	R	0 = Not running at maximum speed 1 = Running at maximum speed.	X	X	X
BI, 11	Digital input 1 status	R	0 = Not active 1 = Active.		X	X
BI, 12	Digital input 2 status	R	0 = Not active 1 = Active.		X	X
BI, 13	Digital input 3 status	R	0 = Not active 1 = Active.		X	X
BI, 14	Digital output 1 status	R	0 = Not active 1 = Active.		X	X
BI, 15	Digital output 2 status	R	0 = Not active 1 = Active.		X	X
BI, 28	Fault simulation status	R	Fault simulation status. 0 = Fault simulation not active 1 = Fault simulation active.	X	X	X

6.3 Binary outputs

Binary objects for control of the Grundfos pump.

ID	Object Name	R/W	Notes	MAGNA + UPE	E-pumps 0.25 - 7.5 kW	CUE + E-pumps 11 - 22 kW
BO, 0	Set control source	W	Sets the control source. Set to 1 to enable pump control via BACnet. 0 = Local control (default) 1 = Bus control.	X	X	X
BO, 1	Relay 1 control	W	Controls relay 1 if bus control is enabled and relay 1 is set to be controlled via bus. 0 = Closed (default) 1 = Open.		X	X
BO, 2	Relay 2 control	W	Controls relay 2 if bus control is enabled and relay 2 is set to be controlled via bus. 0 = Closed (default) 1 = Open.			X
BO, 3	Set direction	W	Sets rotational direction of the pump impeller if bus control is enabled. 0 = Forward (default) 1 = Reverse.		X	X
BO, 4	Reset fault	W	Resets alarm if bus control is enabled. (Triggered on rising edge). 0 = No resetting (default) 1 = Resetting.	X	X	X
BO, 5	Fault simulation	W	Enables simulated fault if bus control is enabled. 0 = Disabled (default) 1 = Enabled.	X	X	X

6.4 Multistate inputs

Objects that contain an enumeration value from the pump.

ID	Object Name	R/W	Notes	MAGNA + UPE	E-pumps 0.25 - 7.5 kW	CUE + E-pumps 11 - 22 kW
MI, 0	Actual control mode	R	Reads the current control mode. 1 = Constant speed 2 = Constant pressure 3 = Proportional pressure 4 = Automatic / AUTO*ADAPT* 5 = Constant flow 6 = Constant temperature 7 = Constant level 8 = Constant percentage. See section *7.1 Control modes* for details on the control modes.	X	X	X
MI, 1	Actual operating mode	R	Reads the current operating mode. 1 = Start (normal) 2 = Stop 3 = Minimum 4 = Maximum.	X	X	X
MI, 2	Next bearing-service type	R	Type of next bearing service. 1 = Service type unknown 2 = Lubricate bearings 3 = Change bearings.			X
MI, 3	CIM status	R	Reads the status of the CIM module, useful for fault finding. 1 = OK 2 = EEPROM fault 3 = Memory fault.	X	X	X

6.5 Multistate outputs

Objects that set an enumeration value in the pump.

ID	Object Name	R/W	Notes	MAGNA + UPE	E-pumps 0.25 - 7.5 kW	CUE + E-pumps 11 - 22 kW
MO, 0	Set control mode	W	Sets the control mode if bus control is enabled. 1 = Constant speed 2 = Constant pressure 3 = Proportional pressure 4 = Automatic / AUTO*ADAPT* 5 = Constant flow 6 = Constant temperature 7 = Constant level 8 = Constant percentage. See section *7.1 Control modes* for details on the control modes.	X	X	X
MO, 1	Set operating mode	W	Sets the operating mode if bus control is enabled. 1 = Start (normal) 2 = Stop 3 = Minimum 4 = Maximum.	X	X	X
MO, 2	Product simulation	W	Enables product simulation (for commissioning and testing purposes, can only be enabled when no physical pump is present). 1 = Disabled (default) 2 = MAGNA 3 = E-pumps 0.25 - 7.5 kW 4 = E-pumps 11 - 22 kW / CUE. See section *7.6 Product simulation* for details.	X	X	X

6.6 Analog inputs

Objects with measured values and status information from the pump.

ID	Object Name	R/W	Notes	Unit	MAGNA + UPE	E-pumps 0.25 - 7.5 kW	CUE + E-pumps 11 - 22 kW
AI, 0	Fault code	R	Grundfos fault code. See section *11. Grundfos alarm and warning codes*.	-	X	X	X
AI, 1	Warning code	R	Grundfos warning code. See section *11. Grundfos alarm and warning codes*.	-		X	X
AI, 2	Time to bearing service	R	Time to bearing service in months. A value of 24 means "24 or more".	month			X
AI, 3	Capacity	R	Actual capacity value (process feedback).	%	X	X	X
AI, 4	Head	R	Actual system head/pressure.	bar	S	S	S
AI, 5	Flow	R	Actual system flow.	m^3/h	S*	S*	S*
AI, 6	Relative performance	R	Performance relative to maximum performance.	%	X	X	X
AI, 7	Speed	R	Motor speed.	rpm	X	X	X
AI, 8	Frequency	R	Actual control signal applied to motor.	Hz	X	X	X
AI, 9	Actual setpoint	R	Actual setpoint.	%	X	X	X
AI, 10	Motor current	R	Actual motor current.	A		X	X
AI, 11	DC link voltage	R	Frequency converter DC Link voltage.	V	X	X	X
AI, 12	Motor voltage	R	Motor voltage.	V		X	X
AI, 13	Power	R	Total power consumption of the pump.	W	X	X	X
AI, 14	Remote flow	R	Measured flow at external sensor.	m^3/h			S
AI, 15	Inlet pressure	R	System inlet pressure.	bar			S
AI, 16	Remote pressure	R	Measured pressure at external sensor.	bar			S
AI, 17	Level	R	Tank level.	m		S	S
AI, 18	Power electronic temperature	R	Temperature in frequency converter.	C°		X	X
AI, 19	Motor temperature	R	Motor winding temperature.	C°			X
AI, 20	Remote temperature	R	Temperature at external sensor.	C°		S	S
AI, 21	Electronic temperature	R	Pump electronics temperature.	C°			S
AI, 22	Fluid temperature	R	Pumped-liquid temperature.	C°			S
AI, 23	Bearing temperature DE	R	Bearing temperature, drive end.	C°			S
AI, 24	Bearing temperature NDE	R	Bearing temperature, non-drive end.	C°			S
AI, 25	Auxiliary sensor input	R	Auxiliary sensor input.	%		S	S
AI, 26	Specific energy	R	Specific energy consumption.	kWh/m^3			CUE
AI, 27	Runtime	R	Total operating time of the pump.	h	X	X	X
AI, 28	Total ontime	R	Total power-on time of the pump.	h	X	X	X
AI, 29	Torque	R	Motor torque.	Nm		3ph	X
AI, 30	Energy consumption	R	Total energy consumption of the pump.	kWh	X	X	X
AI, 31	Number of starts	R	Number of times the pump has started.	-		X	X
AI, 32	Volume	R	Total pumped volume.	m^3			CUE

X = Always available.

S = Sensor required.

S* = On TPE Series 2000 and MAGNA/UPE, the flow is estimated and is only to be used for monitoring, not for control purposes.
On all other pump types, a flow sensor is required.

CUE = Only available on CUE (with sensor).

3ph = Only available on three-phase E-pumps.

6.7 Analog outputs

Object for setting a new setpoint in the pump.

ID	Object Name	R/W	Notes	Unit	MAGNA + UPE	E-pumps 0.25 - 7.5 kW	CUE + E-pumps 11 - 22 kW
AO, 0	Set setpoint	W	Sets the pump setpoint if bus control is enabled. A value of 0 does not imply a stop. See section *7.2 Setpoint*.	%	X	X	X

6.8 Analog values

Objects for configuration of the CIM/CIU 300 and/or the pump.

ID	Object Name	R/W	Notes	Unit	MAGNA + UPE	E-pumps 0.25 - 7.5 kW	CUE + E-pumps 11 - 22 kW
AV, 0	Custom Device Object Instance Number	R/W	Value for Custom Device Object Instance Number. Used in conjunction with DIP switch SW3. See section *3.5 Selecting the Device Object Instance Number*. Present_Value range: 0-0x3FFFFE. Default Present_Value: 0xE7.	-	X	X	X
AV, 1	BACnet watchdog	R/W	Time in seconds before BACnet communication watchdog times out, and sets the pump to local control mode. See section *7.3 BACnet communication watchdog*. 0 = Disabled (default) Set to a value between 5 and 3600 to enable.	s	X	X	X
AV, 2	Simulation fault code	R/W	Fault code to simulate. See section *11. Grundfos alarm and warning codes*. Can be cleared by writing a value of 0.	-	X	X	X
AV, 3	Simulation warning code	R/W	Warning code to simulate. See section *11. Grundfos alarm and warning codes*. Can be cleared by writing a value of 0.	-		X	X

7. Detailed descriptions

7.1 Control modes

Control modes	Description	Illustration
Constant speed	**Open loop** The setpoint of the pump will be interpreted as setpoint for the pump speed in %. The setpoint value is a percentage of the maximum speed of the pump. No sensor is required.	 TM04 2289 2208
Constant pressure	**Closed loop** The setpoint of the pump will be interpreted as setpoint for the pressure. The controller inside the pump will adapt the pump speed so that the pressure is constant, regardless of the flow. A pressure sensor is required.	 TM04 2290 2208
Constant flow Constant level Constant temperature Constant percentage	**Closed loop** Constant flow, constant level, constant temperature or constant percentage can be obtained by replacing the main pressure sensor with another sensor, e.g. a flow sensor is needed for flow control, a level sensor is needed for level control and a temperature sensor is needed for temperature control. Constant flow is illustrated to the right.	 TM04 2288 2208
Proportional pressure	**Closed loop** The setpoint of the pump will be interpreted as basic setpoint for the proportional-pressure mode (the black dot in the illustration). This control mode is only available on GRUNDFOS MAGNA and TPE Series 2000 pumps.	 TM04 2291 2208
Automatic / AUTO*ADAPT*	**Automatic** For this control mode, the optimum setpoint is automatically estimated and used. This also means that any setpoint value is ignored. Only available on GRUNDFOS MAGNA and some three-phase motors of 0.55 - 7.5 kW. A pressure sensor is required.	 TM04 2287 2208

H = Pressure (Head)

Q = Flow

Important notes to control modes

Only valid control modes will be accepted.

Example: If the pump is a TPE Series 2000, and the control mode is changed to Constant temperature, the pump will not change its control mode because it is not possible for a TPE Series 2000 to run in this mode. The mode will then be the last valid control mode.

7.2 Setpoint

This object accepts values ranging from 0 to 100 (0 % to 100 %). This is illustrated in fig. 10.

Note ***The setpoint is a percentage of the maximum setpoint or sensor maximum (max. = 100 %).***

The setpoint value can represent speed, pressure, flow, etc., depending on the selected control mode.

A setpoint of 0 does not imply a stop.

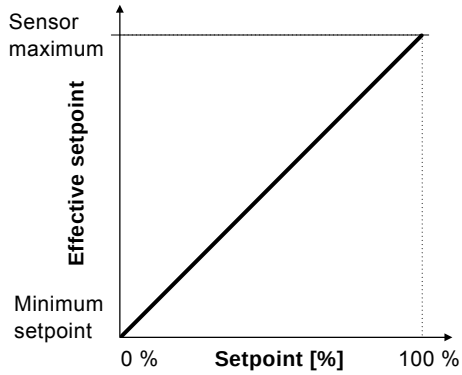

TM04 2373 2508

Fig. 10 Setpoint

7.2.1 Setpoint examples

Closed loop

If the control mode is set to Constant pressure (closed loop) and the pressure sensor is in the range of 0 to 10 bar, a setpoint of 80 % will result in an effective setpoint of 8 bar.

If the sensor range was 0 to 16 bar, a 50 % setpoint would be 8 bar, a 25 % setpoint would be 4 bar, and so on.

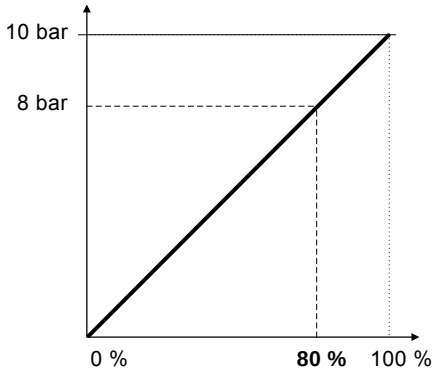

TM04 2371 2508

Fig. 11 Constant pressure

Open loop

If the control mode is set to Constant speed (open loop), the setpoint is interpreted as setpoint for the pump performance.

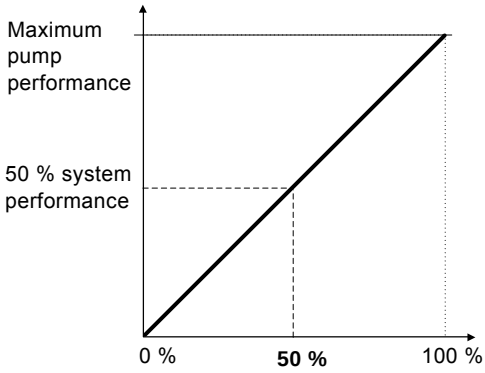

TM04 2372 2508

Fig. 12 Constant speed

7.3 BACnet communication watchdog

A BACnet communication watchdog is implemented in the CIM/CIU 300. If no BACnet communication is detected for the time period defined by the BACnet watchdog object (AV, 1) and the pump is set to Bus control mode (BO, 0), the pump is automatically switched to local control mode, and its local settings will be used.

This functionality can be used to define the pump behaviour in case of a BACnet communication breakdown. Before enabling the watchdog, the local pump settings should be made with either a Grundfos PC Tool or the Grundfos R100 remote control. This ensures that the pump behaves as expected if the BACnet communication breaks down.

When BACnet communication is re-established after a watchdog timeout, the user must manually set the pump back to Bus control mode (BO, 0).

When the Present_Value of the AV, 1 object is set to 0, the watchdog is disabled (default). To enable the watchdog, set the Present_Value to [5-3600] seconds.

7.4 Fault monitoring and resetting

This example shows how to monitor faults or warnings in the Grundfos pump and how to manually reset a fault.

The Fault code object (AV, 0) and the Warning code object (AV, 1) can both hold a Grundfos-specific fault code. See section *11. Grundfos alarm and warning codes* for code interpretation.

Warnings are notifications only and will not stop the pump, whereas faults will stop the pump. Most pumps can be configured to either automatically reset the fault when the fault condition disappears or to require manual resetting.

If a fault is to be manually reset, use the Reset fault object (BO, 4). When the Present_Value of this object is set to 1, a Reset fault command is sent to the device.

7.5 Pump control via BACnet

This example shows how to set a GRUNDFOS MAGNA to 50 % setpoint, in proportional-pressure mode.

- Before enabling pump control via BACnet, values for setpoint, control mode and operating mode should be set.
- Set operating mode with Multistate output 1. In this example, the value for operating mode should be 1 (Start).
- Set control mode with Multistate output 0. A value of 3 corresponds to Proportional pressure.
- Set the setpoint to a value of 50 % in Analog output 0. See section *7.2 Setpoint* for details on setpoint.
- To enable bus control, set Binary output 0 to a value of 1.

Now the GRUNDFOS MAGNA pump should be running at 50 % in proportional-pressure mode, with bus control enabled.

7.6 Product simulation

Product profile simulation (pump simulation) can be useful for testing and pre-commissioning purposes. It is possible to simulate a pump profile when using a CIU 300 that is not connected to a pump. The CIU 300 will behave as if a pump was connected on the GENIbus, even if that is not the case. The objects supported by the simulated product will be available, although the data will only be dummy values that do not simulate real pump behaviour.

Product simulation is enabled by setting the Multistate output object "Product simulation" (MO, 2):

Product to simulate	Value
Disabled (no simulation)	1
MAGNA / UPE	2
E-pumps 0.25 - 7.5 kW	3
E-pumps 11 - 22 kW /CUE	4

Note ***Product simulation will always be disabled on power-up.***

Note ***If a physical pump is detected on GENIbus during power-up, it will not be possible to enable product simulation.***

8. Commissioning

8.1 Step-by-step guide to hardware setup (CIU 300)

Step	Action
1	Complete the pump configuration, e.g. sensor configuration.
2	Select the BACnet MAC address (0-127) on the CIM 300. See section *3.7 Selecting the BACnet MAC address*.
3	Select the transmission speed of the CIM 300. See section *3.4 Setting the BACnet transmission speed*.
4	Select Device Object Instance Number. See section *3.5 Selecting the Device Object Instance Number*.
5	If necessary, set line termination. See section *3.8 Termination resistor*.
6	Connect the GENIbus cable from the CIU 300 to the pump.
7	Connect the necessary cables from the CIU 300 to the BACnet network. See section *3.3 Connecting to the BACnet network*.
8	Connect the power supply cable to the CIU 300, and switch it on.
9	Confirm that the GENIbus LED is constantly green and that the BACnet LED is either off or flashing green (indicating communication). See section *4. LEDs*.
The CIU 300 is now configured and ready.	

8.2 Step-by-step guide to hardware setup (CIM 300)

Step	Action
1	Complete the pump configuration, e.g. sensor configuration.
2	Select the BACnet MAC address (0-127) on the CIM 300. See section *3.7 Selecting the BACnet MAC address*.
3	Select the transmission speed of the CIM 300. See section *3.4 Setting the BACnet transmission speed*.
4	Select Device Object Instance Number. See section *3.5 Selecting the Device Object Instance Number*.
5	If necessary, set line termination. See section *3.8 Termination resistor*.
6	Connect the necessary cables from the CIM 300 to the BACnet network. See section *3.3 Connecting to the BACnet network*.
7	Confirm that the GENIbus LED is constantly green and that the BACnet LED is either off or flashing green (indicating communication). See section *4. LEDs*.
The CIM 300 is now configured and ready.	

9. Fault finding

9.1 LED status

Faults in a CIM/CIU 300 can be detected by observing the status of the two communication LEDs. See the table below.

Fault (LED status)	Possible cause	Remedy
1. Both LEDs (LED1 and LED2) remain off when the power supply is connected, and 5 seconds have passed.	a) The CIM 300 is defective.	Replace the CIM 300.
2. The LED for internal communication (LED2) is flashing red.	a) No internal communication between the CIM/CIU 300 and the Grundfos pump.	• Check the cable connection between the pump and the CIU 300. • Check that the individual conductors have been fitted correctly. • Check the power supply to the pump.
3. The LED for internal communication (LED2) is constantly red.	a) The CIU 300 does not support the connected pump.	Contact the nearest Grundfos company.
4. The BACnet LED (LED1) is constantly red.	a) Fault in the CIM 300 BACnet configuration.	• Ensure that the BACnet MAC address has a valid setting. See section *3.7 Selecting the BACnet MAC address*. • Ensure that the Device Object Instance Number is within the allowed range. See section *3.5 Selecting the Device Object Instance Number*.
5. The BACnet LED (LED1) is flashing red.	a) Fault in the BACnet communication (cyclic redundancy check).	• Check the transmission speed (switches SW4 and SW5). See section *3.4 Setting the BACnet transmission speed*. • Check the cable connection between the CIM 300 and the BACnet network. • Check the termination resistor settings (switches SW1 and SW2). See section *3.8 Termination resistor*.

9.2 BACnet faults

Fault	Possible cause	Remedy
1. The CIM/CIU 300 does not communicate on the BACnet MS/TP network.	a) Configuration or wiring fault.	Ensure that the cable between the BACnet MS/TP devices is connected correctly. See section *3.3 Connecting to the BACnet network* for wiring recommendations.
		Ensure that the BACnet MAC address and Device Object Instance Number are configured correctly and are unique on the network. See section *3.7 Selecting the BACnet MAC address* and *3.5 Selecting the Device Object Instance Number* for address selections.
		Ensure that the transmission speed is configured correctly. See section *3.4 Setting the BACnet transmission speed*.
		Ensure that each end of the BACnet MS/TP trunk cable is terminated, if necessary. See section *3.8 Termination resistor* for line termination of the Grundfos CIM/CIU 300.
		Ensure that the bus topology for a BACnet MS/TP network is correct.
	b) The CIM/CIU 300 is instructed to not communicate on the BACnet network via the DeviceCommunicationControl service.	Use the Device Communication Control service to enable communication from the device.
2. The pump does not react to control commands from the bus.	a) The pump is running in local mode.	Set the pump to bus control by setting the Present_Value of BO, 0 to 1.
3. There are only a few BACnet objects available, and the GENIbus LED flashes red.	a) There is no communication between the CIM 300 and the pump.	Ensure that the GENIbus cable between the CIM 300 and the pump is connected correctly. Ensure that the pump is switched on and able to communicate on GENIbus.

10. BACnet telegrams

10.1 BACnet MS/TP telegram overview

All BACnet MS/TP telegrams have the following format:

Preamble	Telegram type	Destination	Source	Length	Header CRC	Data	Data CRC	(Pad)
2 bytes: 0x55 0xFF	1 byte	1 byte	1 byte	2 bytes, MSB first	1 byte	Variable, [0-501] bytes	2 bytes, LSB first	At most 1 byte 0xFF

For BACnet MS/TP, the destination address and source address are MAC addresses. See section *3.7 Selecting the BACnet MAC address.* A destination address of 255 (0xFF) denotes broadcast.

The Length field specifies the length in bytes of the data field which must be between 0 and 501 bytes long.

10.2 Telegram types

The available telegram types are listed below.

Type	Name	Description
00	Token	Used to pass network mastership to the destination device.
01	Poll for master	Discovers the presence of other master devices on the network.
02	Reply to poll for master	Used by a master to indicate a wish to enter the token ring.
03	Test request	Used to initiate a loopback test.
04	Test response	A reply to a test request telegram.
05	BACnet data, expecting reply	Used for data transmission where a reply is expected.
06	BACnet data, not expecting reply	Used for data transmission where no reply is expected.
07	Reply postponed	Used by master devices to defer sending a BACnet data reply.

11. Grundfos alarm and warning codes

This is a general Grundfos alarm and warning code list.

Code	Description	Code	Description	Code	Description
1	Leakage current	35	Gas in pump head, deaerating problem	76	Internal communication fault
2	Missing phase	36	Discharge valve leakage	77	Communication fault, twin-head pump
3	External fault signal	37	Suction valve leakage	78	Fault, speed plug
4	Too many restarts	38	Vent valve defective	79	Functional fault, add-on module
5	Regenerative braking	40	Undervoltage	80	Hardware fault, type 2
6	Mains fault	41	Undervoltage transient	81	Verification error, data area (RAM)
7	Too many hardware shutdowns	42	Cut-in fault (dV/dt)	82	Verification error, code area (ROM, FLASH)
8	PWM switching frequency reduced	45	Voltage asymmetry	83	Verification error, FE parameter area (EEPROM)
9	Phase sequence reversal	48	Overload	84	Memory access error
10	Communication fault, pump	49	Overcurrent (i_line, i_dc, i_mo)	85	Verification error, BE parameter area (EEPROM)
11	Water-in-oil fault (motor oil)	50	Motor protection function, general shutdown (mpf)	88	Sensor fault
12	Time for service (general service information)	51	Blocked motor/pump	89	Signal fault, (feedback) sensor 1
13	Moisture alarm, analog	52	Motor slip high	90	Signal fault, speed sensor
14	Electronic DC-link protection activated (ERP)	53	Kipped motor	91	Signal fault, temperature 1 sensor
15	Communication fault, main system (SCADA)	54	Motor protection function, 3 sec. limit	92	Calibration fault, (feedback) sensor
16	Other	55	Motor current protection activated (MCP)	93	Signal fault, sensor 2
17	Performance requirement cannot be met	56	Underload	94	Limit exceeded, sensor 1
18	Commanded alarm standby (trip)	57	Dry running	95	Limit exceeded, sensor 2
19	Diaphragm break (dosing pump)	58	Low flow	96	Setpoint signal outside range
20	Insulation resistance low	59	No flow	97	Signal fault, setpoint input
21	Too many starts per hour	64	Overtemperature	98	Signal fault, input for setpoint influence
22	Moisture switch alarm, digital	65	Motor temperature 1 (t_m or t_mo or t_mo1)	99	Signal fault, input for analog setpoint
23	Smart trim gap alarm	66	Temperature, control electronics (t_e)	104	Software shutdown
24	Vibration	67	Temperature too high, internal frequency converter module (t_m)	105	Electronic rectifier protection activated (ERP)
25	Setup conflict	68	External temperature/ water temperature (t_w)	106	Electronic inverter protection activated (EIP)
26	Load continues even if the motor has been switched off	69	Thermal relay 1 in motor (e.g. Klixon)	110	Skew load, electrical asymmetry
27	External motor protector activated (e.g. MP 204)	70	Thermal relay 2 in motor (e.g. thermistor)	111	Current asymmetry
28	Battery low	71	Motor temperature 2 (Pt100, t_mo2)	112	Cos φ too high
29	Turbine operation (impellers forced backwards)	72	Hardware fault, type 1	113	Cos φ too low
30	Change bearings (specific service information)	73	Hardware shutdown (HSD)	120	Auxiliary winding fault (single-phase motors)
31	Change varistor(s) (specific service information)	74	Internal supply voltage too high	121	Auxiliary winding current too high (single-phase motors)
32	Overvoltage	75	Internal supply voltage too low	122	Auxiliary winding current too low (single-phase motors)

Code	Description	Code	Description	Code	Description
123	Start capacitor, low (single-phase motors)	183	Signal fault, extra temperature sensor	216	Pilot pump alarm
124	Run capacitor, low (single phase motors)	184	Signal fault, general-purpose sensor	217	Alarm, general-purpose sensor high
144	Motor temperature 3 (Pt100, t_mo3)	185	Unknown sensor type	218	Alarm, general-purpose sensor low
145	Bearing temperature high (Pt100), in general or top bearing	186	Signal fault, power meter sensor	219	Pressure relief not adequate
146	Bearing temperature high (Pt100), middle bearing	187	Signal fault, energy meter	220	Fault, motor contactor feedback
147	Bearing temperature high (Pt100), bottom bearing	188	Signal fault, user-defined sensor	221	Fault, mixer contactor feedback
148	Motor bearing temperature high (Pt100) in drive end (DE)	190	Sensor limit 1 exceeded (e.g. alarm level in WW application)	222	Time for service, mixer
149	Motor bearing temperature high (Pt100) in non-drive end (NDE)	191	Sensor limit 2 exceeded (e.g. high level in WW application)	223	Maximum number of mixer starts per hour exceeded
152	Communication fault, add-on module	192	Sensor limit 3 exceeded (e.g. overflow level in WW application)	224	Pump fault (due to auxiliary component or general fault)
153	Fault, analog output	193	Sensor limit 4 exceeded	225	Communication fault, pump module
154	Communication fault, display	194	Sensor limit 5 exceeded	226	Communication fault, I/O module
155	Inrush fault	195	Sensor limit 6 exceeded	227	Combi event
156	Communication fault, internal frequency converter module	196	Operation with reduced efficiency	228	Not used
157	Real-time clock out of order	197	Operation with reduced pressure	229	Not used
158	Hardware circuit measurement fault	198	Operation with increased power consumption	230	Network alarm
159	CIM fault (Communication Interface Module)	199	Process out of range (monitoring/ estimation/calculation/control)	231	Ethernet: No IP address from DHCP server
160	GSM modem, SIM card fault	200	Application alarm	232	Ethernet: Auto-disabled due to misuse
168	Signal fault, pressure sensor	201	External sensor input high	233	Ethernet: IP address conflict
169	Signal fault, flow sensor	202	External sensor input low	236	Pump 1 fault
170	Signal fault, water-in-oil (WIO) sensor	203	Alarm on all pumps	237	Pump 2 fault
171	Signal fault, moisture sensor	204	Inconsistency between sensors	238	Pump 3 fault
172	Signal fault, atmospheric pressure sensor	205	Level float switch sequence inconsistency	239	Pump 4 fault
173	Signal fault, rotor position sensor (Hall sensor)	206	Water shortage, level 1	240	Lubricate bearings (specific service information)
174	Signal fault, rotor origo sensor	207	Water leakage	241	Motor phase failure
175	Signal fault, temperature 2 sensor (t_mo2)	208	Cavitation	242	Automatic motor model recognition failed
176	Signal fault, temperature 3 sensor (t_mo3)	209	Non-return valve fault	243	Motor relay has been forced (manually operated/commanded)
177	Signal fault, Smart trim gap sensor	210	Overpressure	244	Fault, On/Off/Auto switch
178	Signal fault, vibration sensor	211	Underpressure	245	Pump continuous runtime too long
179	Signal fault, bearing temperature sensor (Pt100), general or top bearing	212	Diaphragm tank precharge pressure out of range	246	User-defined relay has been forced (manually operated/ commanded)
180	Signal fault, bearing temperature sensor (Pt100), middle bearing	213	VFD not ready	247	Power-on notice (device/system has been switched off)
181	Signal fault, PTC sensor (short-circuited)	214	Water shortage, level 2	248	Fault, battery/UPS
182	Signal fault, bearing temperature sensor (Pt100), bottom bearing	215	Soft pressure build-up timeout		

12. BACnet MAC address

BACnet address	SW6	SW7
0	0	0
1	0	1
2	0	2
3	0	3
4	0	4
5	0	5
6	0	6
7	0	7
8	0	8
9	0	9
10	0	A
11	0	B
12	0	C
13	0	D
14	0	E
15	0	F
16	1	0
17	1	1
18	1	2
19	1	3
20	1	4
21	1	5
22	1	6
23	1	7
24	1	8
25	1	9
26	1	A
27	1	B
28	1	C
29	1	D
30	1	E
31	1	F
32	2	0
33	2	1
34	2	2
35	2	3
36	2	4
37	2	5
38	2	6
39	2	7
40	2	8
41	2	9
42	2	A
43	2	B
44	2	C
45	2	D
46	2	E
47	2	F
48	3	0
49	3	1
50	3	2
51	3	3
52	3	4
53	3	5
54	3	6
55	3	7
56	3	8
57	3	9
58	3	A
59	3	B
60	3	C
61	3	D
62	3	E
63	3	F
64	4	0
65	4	1
66	4	2
67	4	3
68	4	4
69	4	5
70	4	6
71	4	7
72	4	8
73	4	9
74	4	A
75	4	B
76	4	C
77	4	D
78	4	E
79	4	F
80	5	0
81	5	1
82	5	2
83	5	3
84	5	4
85	5	5
86	5	6
87	5	7
88	5	8
89	5	9
90	5	A
91	5	B
92	5	C
93	5	D
94	5	E
95	5	F
96	6	0
97	6	1
98	6	2
99	6	3
100	6	4
101	6	5
102	6	6
103	6	7
104	6	8
105	6	9
106	6	A
107	6	B
108	6	C
109	6	D
110	6	E
111	6	F
112	7	0
113	7	1
114	7	2
115	7	3
116	7	4
117	7	5
118	7	6
119	7	7
120	7	8
121	7	9
122	7	A
123	7	B
124	7	C
125	7	D
126	7	E
127	7	F

If the MAC address switches are set to an invalid MAC address value, a MAC address of 0 will be used.

13. Disposal

This product or parts of it must be disposed of in an environmentally sound way:

1. Use the public or private waste collection service.
2. If this is not possible, contact the nearest Grundfos company or service workshop.

Subject to alterations.

Argentina
Bombas GRUNDFOS de Argentina S.A.
Ruta Panamericana km. 37.500 Lote 34A
1619 - Garin
Pcia. de Buenos Aires
Phone: +54-3327 414 444
Telefax: +54-3327 411 111

Australia
GRUNDFOS Pumps Pty. Ltd.
P.O. Box 2040
Regency Park
South Australia 5942
Phone: +61-8-8461-4611
Telefax: +61-8-8340 0155

Austria
GRUNDFOS Pumpen Vertrieb Ges.m.b.H.
Grundfosstraße 2
A-5082 Grödig/Salzburg
Tel.: +43-6246-883-0
Telefax: +43-6246-883-30

Belgium
N.V. GRUNDFOS Bellux S.A.
Boomsesteenweg 81-83
B-2630 Aartselaar
Tél.: +32-3-870 7300
Télécopie: +32-3-870 7301

Belorussia
Представительство ГРУНДФОС в Минске
220123, Минск,
ул. В. Хоружей, 22, оф. 1105
Тел.: +(37517) 233 97 65,
Факс: +(37517) 233 97 69
E-mail: grundfos_minsk@mail.ru

Bosnia/Herzegovina
GRUNDFOS Sarajevo
Trg Heroja 16,
BiH-71000 Sarajevo
Phone: +387 33 713 290
Telefax: +387 33 659 079
e-mail: grundfos@bih.net.ba

Brazil
Mark GRUNDFOS Ltda.
Av. Humberto de Alencar Castelo Branco, 630
CEP 09850 - 300
São Bernardo do Campo - SP
Phone: +55-11 4393 5533
Telefax: +55-11 4343 5015

Bulgaria
GRUNDFOS Pumpen Vertrieb
Representative Office - Bulgaria
Bulgaria, 1421 Sofia
Lozenetz District
105-107 Arsenalski blvd.
Phone: +359 2963 3820, 2963 5653
Telefax: +359 2963 1305

Canada
GRUNDFOS Canada Inc.
2941 Brighton Road
Oakville, Ontario
L6H 6C9
Phone: +1-905 829 9533
Telefax: +1-905 829 9512

China
GRUNDFOS Pumps (Shanghai) Co. Ltd.
51 Floor, Raffles City
No. 268 Xi Zang Road. (M)
Shanghai 200001
PRC
Phone: +86-021-612 252 22
Telefax: +86-021-612 253 33

Croatia
GRUNDFOS CROATIA d.o.o.
Cebini 37, Buzin
HR-10010 Zagreb
Phone: +385 1 6595 400
Telefax: +385 1 6595 499
www.grundfos.hr

Czech Republic
GRUNDFOS s.r.o.
Čajkovského 21
779 00 Olomouc
Phone: +420-585-716 111
Telefax: +420-585-716 299

Denmark
GRUNDFOS DK A/S
Martin Bachs Vej 3
DK-8850 Bjerringbro
Tlf.: +45-87 50 50 50
Telefax: +45-87 50 51 51
E-mail: info_GDK@grundfos.com
www.grundfos.com/DK

Estonia
GRUNDFOS Pumps Eesti OÜ
Peterburi tee 92G
11415 Tallinn
Tel: + 372 606 1690
Fax: + 372 606 1691

Finland
OY GRUNDFOS Pumput AB
Mestarintie 11
FIN-01730 Vantaa
Phone: +358-3066 5650
Telefax: +358-3066 56550

France
Pompes GRUNDFOS Distribution S.A.
Parc d'Activités de Chesnes
57, rue de Malacombe
F-38290 St. Quentin Fallavier (Lyon)
Tél.: +33-4 74 82 15 15
Télécopie: +33-4 74 94 10 51

Germany
GRUNDFOS GMBH
Schlüterstr. 33
40699 Erkrath
Tel.: +49-(0) 211 929 69-0
Telefax: +49-(0) 211 929 69-3799
e-mail: infoservice@grundfos.de
Service in Deutschland:
e-mail: kundendienst@grundfos.de

Greece
GRUNDFOS Hellas A.E.B.E.
20th km. Athinon-Markopoulou Av.
P.O. Box 71
GR-19002 Peania
Phone: +0030-210-66 83 400
Telefax: +0030-210-66 46 273

Hong Kong
GRUNDFOS Pumps (Hong Kong) Ltd.
Unit 1, Ground floor
Siu Wai Industrial Centre
29-33 Wing Hong Street &
68 King Lam Street, Cheung Sha Wan
Kowloon
Phone: +852-27861706 / 27861741
Telefax: +852-27858664

Hungary
GRUNDFOS Hungária Kft.
Park u. 8
H-2045 Törökbálint,
Phone: +36-23 511 110
Telefax: +36-23 511 111

India
GRUNDFOS Pumps India Private Limited
118 Old Mahabalipuram Road
Thoraipakkam
Chennai 600 096
Phone: +91-44 2496 6800

Indonesia
PT GRUNDFOS Pompa
Jl. Rawa Sumur III, Blok III / CC-1
Kawasan Industri, Pulogadung
Jakarta 13930
Phone: +62-21-460 6909
Telefax: +62-21-460 6910 / 460 6901

Ireland
GRUNDFOS (Ireland) Ltd.
Unit A, Merrywell Business Park
Ballymount Road Lower
Dublin 12
Phone: +353-1-4089 800
Telefax: +353-1-4089 830

Italy
GRUNDFOS Pompe Italia S.r.l.
Via Gran Sasso 4
I-20060 Truccazzano (Milano)
Tel.: +39-02-95838112
Telefax: +39-02-95309290 / 95838461

Japan
GRUNDFOS Pumps K.K.
Gotanda Metalion Bldg., 5F,
5-21-15, Higashi-gotanda
Shiagawa-ku, Tokyo
141-0022 Japan
Phone: +81 35 448 1391
Telefax: +81 35 448 9619

Korea
GRUNDFOS Pumps Korea Ltd.
6th Floor, Aju Building 679-5
Yeoksam-dong, Kangnam-ku, 135-916
Seoul, Korea
Phone: +82-2-5317 600
Telefax: +82-2-5633 725

Latvia
SIA GRUNDFOS Pumps Latvia
Deglava biznesa centrs
Augusta Deglava ielā 60, LV-1035, Rīga,
Tālr.: + 371 714 9640, 7 149 641
Fakss: + 371 914 9646

Lithuania
GRUNDFOS Pumps UAB
Smolensko g. 6
LT-03201 Vilnius
Tel: + 370 52 395 430
Fax: + 370 52 395 431

Malaysia
GRUNDFOS Pumps Sdn. Bhd.
7 Jalan Peguam U1/25
Glenmarie Industrial Park
40150 Shah Alam
Selangor
Phone: +60-3-5569 2922
Telefax: +60-3-5569 2866

México
Bombas GRUNDFOS de México S.A. de C.V.
Boulevard TLC No. 15
Parque Industrial Stiva Aeropuerto
Apodaca, N.L. 66600
Phone: +52-81-8144 4000
Telefax: +52-81-8144 4010

Netherlands
GRUNDFOS Netherlands
Veluwezoom 35
1326 AE Almere
Postbus 22015
1302 CA ALMERE
Tel.: +31-88-478 6336
Telefax: +31-88-478 6332
e-mail: info_gnl@grundfos.com

New Zealand
GRUNDFOS Pumps NZ Ltd.
17 Beatrice Tinsley Crescent
North Harbour Industrial Estate
Albany, Auckland
Phone: +64-9-415 3240
Telefax: +64-9-415 3250

Norway
GRUNDFOS Pumper A/S
Strømsveien 344
Postboks 235, Leirdal
N-1011 Oslo
Tlf.: +47-22 90 47 00
Telefax: +47-22 32 21 50

Poland
GRUNDFOS Pompy Sp. z o.o.
ul. Klonowa 23
Baranowo k. Poznania
PL-62-081 Przeźmierowo
Tel: (+48-61) 650 13 00
Fax: (+48-61) 650 13 50

Portugal
Bombas GRUNDFOS Portugal, S.A.
Rua Calvet de Magalhães, 241
Apartado 1079
P-2770-153 Paço de Arcos
Tel.: +351-21-440 76 00
Telefax: +351-21-440 76 90

România
GRUNDFOS Pompe România SRL
Bd. Biruintei, nr 103
Pantelimon county Ilfov
Phone: +40 21 200 4100
Telefax: +40 21 200 4101
E-mail: romania@grundfos.ro

Russia
ООО Грундфос
Россия, 109544 Москва, ул. Школьная 39
Тел. (+7) 495 737 30 00, 564 88 00
Факс (+7) 495 737 75 36, 564 88 11
E-mail
grundfos.moscow@grundfos.com

Serbia
GRUNDFOS Predstavništvo Beograd
Dr. Milutina Ivkovića 2a/29
YU-11000 Beograd
Phone: +381 11 26 47 877 / 11 26 47 496
Telefax: +381 11 26 48 340

Singapore
GRUNDFOS (Singapore) Pte. Ltd.
24 Tuas West Road
Jurong Town
Singapore 638381
Phone: +65-6865 1222
Telefax: +65-6861 8402

Slovenia
GRUNDFOS PUMPEN VERTRIEB Ges.m.b.H.,
Podružnica Ljubljana
Šlandrova 8b, SI-1231 Ljubljana-Črnuče
Phone: +386 1 568 0610
Telefax: +386 1 568 0619
E-mail: slovenia@grundfos.si

Spain
Bombas GRUNDFOS España S.A.
Camino de la Fuentecilla, s/n
E-28110 Algete (Madrid)
Tel.: +34-91-848 8800
Telefax: +34-91-628 0465

Sweden
GRUNDFOS AB
Box 333 (Lunnagårdsgatan 6)
431 24 Mölndal
Tel.: +46(0)771-32 23 00
Telefax: +46(0)31-331 94 60

Switzerland
GRUNDFOS Pumpen AG
Bruggacherstrasse 10
CH-8117 Fällanden/ZH
Tel.: +41-1-806 8111
Telefax: +41-1-806 8115

Taiwan
GRUNDFOS Pumps (Taiwan) Ltd.
7 Floor, 219 Min-Chuan Road
Taichung, Taiwan, R.O.C.
Phone: +886-4-2305 0868
Telefax: +886-4-2305 0878

Thailand
GRUNDFOS (Thailand) Ltd.
92 Chaloem Phrakiat Rama 9 Road,
Dokmai, Pravej, Bangkok 10250
Phone: +66-2-725 8999
Telefax: +66-2-725 8998

Turkey
GRUNDFOS POMPA San. ve Tic. Ltd. Sti.
Gebze Organize Sanayi Bölgesi
Ihsan dede Caddesi,
2. yol 200. Sokak No. 204
41490 Gebze/ Kocaeli
Phone: +90 - 262-679 7979
Telefax: +90 - 262-679 7905
E-mail: satis@grundfos.com

Ukraine
ТОВ ГРУНДФОС УКРАЇНА
01010 Київ, Вул. Московська 8б,
Тел.:(+38 044) 390 40 50
Фах.: (+38 044) 390 40 59
E-mail: ukraine@grundfos.com

United Arab Emirates
GRUNDFOS Gulf Distribution
P.O. Box 16768
Jebel Ali Free Zone
Dubai
Phone: +971-4- 8815 166
Telefax: +971-4-8815 136

United Kingdom
GRUNDFOS Pumps Ltd.
Grovebury Road
Leighton Buzzard/Beds. LU7 8TL
Phone: +44-1525-850000
Telefax: +44-1525-850011

U.S.A.
GRUNDFOS Pumps Corporation
17100 West 118th Terrace
Olathe, Kansas 66061
Phone: +1-913-227-3400
Telefax: +1-913-227-3500

Usbekistan
Представительство ГРУНДФОС в Ташкенте
700000 Ташкент ул.Усмана Носира 1-й тупик 5
Телефон: (3712) 55-68-15
Факс: (3712) 53-36-35

Addresses revised 15.06.2009

97572650 1109	GB